



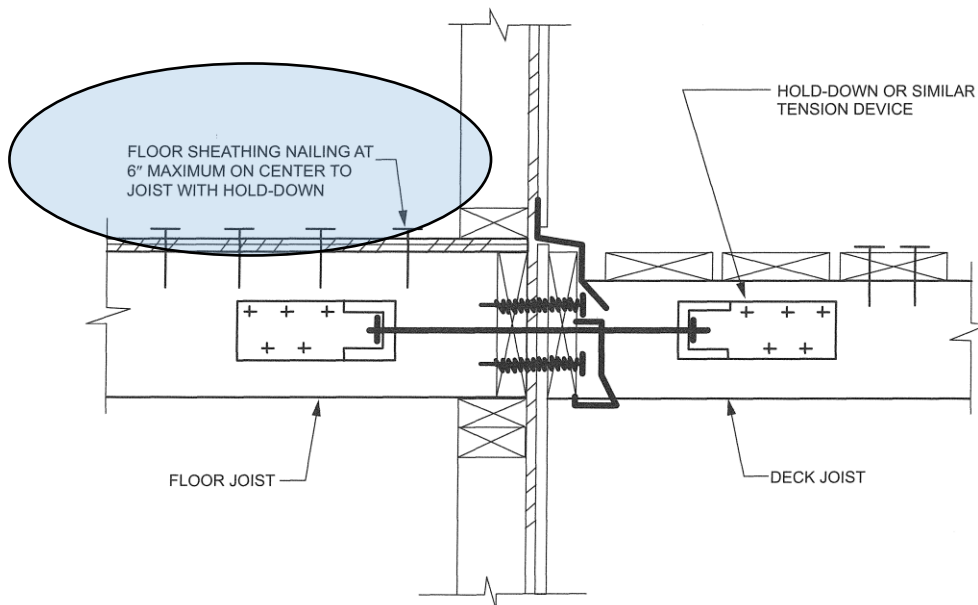

## 2018 IRC Question Of The Week

When a tension or hold-down device is fastened to a floor joist and opposing deck joist to satisfy lateral load requirements for the deck attachment to the dwelling, interior floor sheathing covering that joist shall be nailed \_\_\_ inches maximum on center at that joist.

- A) 4
- B) 6
- C) 8
- D) 12



For SI: 1 inch = 25.4 mm.

FIGURE R507.9.2(1)  
DECK ATTACHMENT FOR LATERAL LOADS